

Role of cations on the dissolution mechanism of kaolinite in high alkaline media

Noel Essey N'Guessan, Emmanuel Joussein, Alexandra Courtin-Nomade, Erwan Paineau, Marilyne Soubrand, Olivier Grauby, Valentin Robin, Coelho Diogo Cristina, Delphine Vantelon, Pascale Launois, et al.

▶ To cite this version:

Noel Essey N'Guessan, Emmanuel Joussein, Alexandra Courtin-Nomade, Erwan Paineau, Marilyne Soubrand, et al.. Role of cations on the dissolution mechanism of kaolinite in high alkaline media. Applied Clay Science, 2021, 205, pp.106037. 10.1016/j.clay.2021.106037. hal-03281851

HAL Id: hal-03281851 https://unilim.hal.science/hal-03281851

Submitted on 10 Mar 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



1 Role of cations on the dissolution mechanism of kaolinite in high alkaline media

- 3 Noel Essey N'GUESSAN¹, Emmanuel JOUSSEIN^{1*}, Alexandra COURTIN-NOMADE², Erwan
- 4 PAINEAU³, Marilyne SOUBRAND¹, Olivier GRAUBY⁴, Cristina COELHO DIOGO⁵, Delphine
- 5 VANTELON⁶, Pascale LAUNOIS³, Valentin ROBIN¹, Patrice FONDANECHE¹, Sylvie
- 6 ROSSIGNOL⁷, Nathalie TEXIER-MANDOKI⁸, Xavier BOURBON⁸
- 8 ¹ Université de Limoges, FST, E2Lim PEIRENE-EAU EA 7500, 123 avenue Albert Thomas,
- 9 87060 Limoges, France.

2

- ² Université Paris-Saclay, CNRS, GEOPS, Orsay, 91405, France.
- ³ Université Paris-Saclay, CNRS, Laboratoire de Physique des Solides, Orsay, 91405, France
- ⁴ Centre Interdisciplinaire de Nanoscience de Marseille (CINaM), CNRS/Aix-Marseille
- 13 Université, Campus de Luminy, 13288 Marseille, France.
- ⁵ Institut des Matériaux de Paris Centre FR2482, Sorbonne Université, Faculté des Sciences et
- 15 Ingénierie, 4 place Jussieu 75005 Paris, France.
- ⁶ Synchrotron SOLEIL, LUCIA beamline, L'Orme des Merisiers, 91190 Saint-Aubin, France.
- ⁷ Université de Limoges, IRCER, Centre Européen de la Céramique, 12 rue Atlantis, 87068
- 18 Limoges, France.
- 19 ⁸ Andra, Agence Nationale pour la Gestion des Déchets Radioactifs, 92290 Châtenay-Malabry,
- 20 France.

* Corresponding author. Emmanuel JOUSSEIN, Université de Limoges, FST, E2Lim PEIRENE-

EAU EA 7500, 123 avenue Albert Thomas, 87060 Limoges, France. Mail.

emmanuel.joussein@unilim.fr

To be submitted to Applied Clay Science

Abstract

Kaolinite and its dehydroxylated forms are widely used in industrial applications, particularly in alkaline media. Geopolymers are among the latest applications that are attracting significant interest. Until now, a deep understanding of the dissolution mechanism of kaolinite particles in alkaline media is still lacking. This work aims to well understand the dissolution mechanisms of two references kaolinites (KGa-1b and KGa-2) regarding various 2 M alkali treatment (KOH, NaOH and 50/50 NaOH + KOH) along time and at 80°C through aluminum and silicon leaching. For this, a wide range of methods have been used, from the determination of [Si] and [Al] in solution to the analysis of solids by combining X-ray diffraction (XRD), Fourier Transformed Infrared (FTIR), X-ray Absorption Near edge Structure (XANES) and Magic Angle Spinning Nuclear Magnetic Resonance (MAS-NMR) spectroscopies and electronic microscopy observations. The results show that the dissolution rate is higher in the poorly crystallized kaolinites (confirming the role of the crystallinity of the samples towards reactivity in an alkaline media) but also a significant effect of the type of cation (the degree of dissolution following the

sequence KOH<NaOH + KOH<NaOH). This dissolution is followed by a change in the speciation of the aluminum from 6-coordinated to a 4-coordinated, as shown by XAS and MAS-NMR results. The dissolution process at the particle scale is different: with KOH, the dissolution is homogeneous, starting from the edges and surfaces, whereas in the case of NaOH, the dissolution is oriented thanks to areas of less coherence.

48

49

50

Highlights:

- The degree of dissolution of kaolinites is linked to the type of alkaline treatment.
- The dissolution rate is higher in the poorly crystallized kaolinites.
- The dissolution is accompanied by a change in the speciation of the aluminum.
- The particle dissolution process is homogeneous in KOH and oriented with NaOH

54

Keywords: alkaline activation, kaolinite, XRD, TEM-EDS, XANES, MAS-NMR, dissolution.

56

Graphical abstract: see attached file

58

59

60

61

62

63

57

1. Introduction

Since the past decades, there has been increasing interest in producing eco-friendly geomaterials from natural and inexpensive materials such as alkali activated materials s.l. or specifically geopolymers. These geomaterials are promising since their properties are comparable to that obtained from Ordinary Portland Cement (OPC) while reducing the energy required during

manufacture (Habert et al., 2011). Geopolymers result from the activation of aluminosilicates sources, such as fly-ash or clay minerals used as precursors, in a high concentrated alkali media (NaOH or KOH) to form free SiO₄ and AlO₄ tetrahedrons at ambient temperatures. The polycondensation (i.e. geopolymerization reaction) results from the reaction of aluminate and silicate dissolved monomers (Duxson et al., 2007; van Deventer et al., 2007). The tetrahedrally coordinated aluminum carries a negative charge that is counterbalanced by an alkali cation such as Na⁺ or K⁺. Finally, geopolymers present an amorphous 3D aluminosilicate structure. It is widely accepted that the resulting properties of geopolymer binder depend on the Si/Al ratio of the initial mixture and the kinetic dissolution of the raw aluminosilicate source (i.e., rate and relative amount of Si and Al release in the solution; Catauro et al., 2014). Thus, understanding the chemical reactivity of the Si and Al source during the first steps of an alkali treatment is key to better predict, and control, the properties of geopolymer based materials. The main source of aluminosilicates in this context is the kaolinite. Kaolinite is a dioctahedral 1:1 clay mineral highly used in a variety of industrial applications (e.g. paper-coating, filler, paint pigment, ceramics, pharmaceutical to cite a few; see large literature such as Murray (2006)). The theoretical formulae of kaolinite is Al₂Si₂O₅(OH)₄ in which one Al octahedral sheet and one Si tetrahedral sheet are linked to each other by sharing apical oxygen atoms from the tetrahedral sheet. One of the main characteristics of most varieties of kaolinite is a defective structure (Bailey, 1988; Brindley, 1986; Sakharov et al., 2016) resulting in a variety of physical and chemical properties governing its uses (Murray, 2000). Moreover, it is common to modify the properties of raw material in the way to increase their reactivity by thermal treatment or grinding for instance (San Nicolas et al., 2013). According to this, kaolinite is conventionally heat-treated to form metakaolin. The metakaolin is the most used material for geopolymers because of its initial Si and Al content (highest alumina content) but also because of its rapid dissolution in

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

alkaline medium which will confer various properties (such as mechanical properties, high fire resistance...) of use to geopolymers (Autef et al., 2013). The reactivity of metakaolin depends on several factors: (i) the dehydroxylation process of kaolinite as well as the applied temperature, i.e. flash calciner, rotary kiln or vertical multiple-hearth oven from 500 to 800 °C (Belver et al., 2002), (ii) the purity i.e. the amount of accessories minerals (up to 30% in mixture) such as quartz, feldspars, rutile or anatase (Cui et al., 2008; Medri et al., 2011), and (iii) the properties of the initial primary kaolinite crystals (Kuenzel et al., 2013; Rahier et al., 1997). The latter is an important factor depending on the type of deposit and is mainly related to the crystal chemistry of the initial kaolinite (Heller-Kallai and Lapides, 2007). However, the impact of the primary kaolinite crystal chemistry used for the metakaolin processing on their reactivity in alkaline media is still not clear. Therefore, it is essential to fully understand the main factors that drive the reactivity of kaolinites in an alkaline medium through the dissolution of its component species. The dissolution process of kaolinite under different conditions in terms of alkali type (NaOH or KOH), concentration, pH and temperature has been previously mentioned in the literature. For example, Huertas et al. (1999) studied the dissolution of kaolinite over a pH range of 1 to 13. The authors evidenced a deprotonation of the octahedral surface occurring at high pH value (> 9) along with the formation of an AlO type surface complex followed by the release of structural Al and the dissolution of kaolinite particles. Interestingly, the octahedral layer also appears to be the main factor limiting the dissolution rate of kaolinite in an alkaline solution (KOH of 0.1 to 4 M; Bauer and Berger (1998)). These findings agree with the previous work of Carroll and Walther (1990) which evidenced a slower detachment of Si from the kaolinite structure (thus forming SiO- complexes) than that of Al when the clay particles were dissolved. Pentrak et al. (2009) demonstrated, during an alkaline treatment in KOH, that a lower structural ordering and a less regular shape of the crystallites are causing faster dissolution. In terms of cationic effect (e.g.

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

Na⁺, K⁺...), it would suggest that the degree of dissolution of Al and Si atoms is significantly higher (40%) in a sodium hydroxide (NaOH) solution than in a KOH solution²². Recently, Naderi Khorshidi et al. (2017, 2018) have studied by molecular dynamics simulation, the modification and/or dissolution of two basal surfaces of kaolinite in various alkaline media (1 M and 5 M) for three different alkaline solutions (containing Na⁺, K⁺ and a mixture of 50/50 Na⁺/K⁺ cations) at ambient conditions. The results evidence that Na+ and K+ induce different dissolution mechanisms related to different dissociation of the surface hydroxyl groups of kaolinite particles. The authors also explained that a synergistic effect of both cations is effective in the case of the 50/50 mixture leading to more surface structure distortion. Until now, a deep understanding of the dissolution mechanism of kaolinite particles is still lacking. It requires considering both the crystallochemistry of kaolinite, the nature of cation (containing Na⁺, K⁺ and a mixture of Na⁺/K⁺ cations) and their impact onto the solid structure. It is essential to understand how kaolinite reacts (dissolves) in an alkaline medium in order to better understand geopolymerization reactions (quantity of Si and Al species in solution, speciation of Al i.e. (IV)- or (VI)-coordinated) and the choice of aluminosilicate mineral raw material. Here, we proposed to better understand the dissolution mechanisms of two references kaolinites (KGa-1b and KGa-2) regarding various 2 M alkali treatment (KOH, NaOH and 50/50 NaOH + KOH; type of alkali solutions was chosen according to the geopolymerization literature; see for example Aldabsheh et al. (2015) or Xu and van Deventer (2000)) along time and at 80°C through aluminum and silicon leaching. These two references kaolinites, KGa-1b and KGa-2, differ in terms of structural disorder. In this framework, we studied the release of both Al and Si from kaolinite platelets by monitoring the structural evolution of the solid phase by combining X-ray diffraction (XRD), Fourier Transformed Infrared (FTIR), X-ray Absorption Near edge Structure (XANES) spectroscopies and microscopy observations. Altogether, our results unravel (i) the

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

importance of kaolinite crystallochemistry on its chemical reactivity, (ii) the effect of the type of cation toward dissolution rates and associated mechanisms and then (iii) the occurrence and effect on dissolution rates and solid modification of different dissolution mechanisms involved in alkaline media treatments.

2. Material and Methods

2.1. Background onto reference kaolinites

Two reference kaolinites referred as KGa-1b and KGa-2 hereafter were provided by the Clay Mineral Society. These kaolinites are representative of commonly occurring, natural kaolinite materials and are distinguished by phase purity and availability (Sakharov et al., 2016). These two samples are well known in the literature (for example reader referred to the baseline studies of the Clay Minerals Society source clays in Costanzo and Guggenheim (2001)), the main properties (chemical analysis and main physico-chemical properties) are reported in the Table SI 1 in Supplementary Information. The initial mineralogy is dominated by kaolinite (96 % for KGa-1b and KGa-2) with some accessory minerals, i.e. 3% of anatase and 1% of quartz for KGa-1b; 3% of anatase and 1% of mica and/or illite and quartz for KGa-2. The presence of other silicate minerals than kaolinite, *e.g.* quartz, may imply a Si/Al ratio slightly different than 1 in agreement with chemical analyses reported in Table SI 1.

2.2. Alkali treatment experiment

The treatment was performed at 80°C in three different alkali media (pure KOH, pure NaOH, or a mixture of KOH + NaOH 50/50) at the same 2 M concentration in OH (*ca* pH 14). Briefly, KOH

and NaOH pellets (VWR analytical reagents grade) were dissolved in double-deionized water. 300 mg of KGa-1b or KGa-2 were mixed with 30 ml of 2 M alkali solutions in Teflon vessels. The mixtures were shaken in a Memmert water-bath stirrer at 80°C at various time steps (1, 3, 6, 12, 24 h). Each experiment was realized in sacrificial mode. After shaking, the liquid and the solid phases were separated by centrifugation at 2734 g for 5 min at room temperature. The supernatants were filtered at 0.45 µm from cellulose acetate filters and diluted in acidic media (HNO₃ 2%) prior to analysis. The solid residues were rapidly washed twice by dispersion in deionized water and centrifugation at 4000 rpm for 5 min to stop alkali treatment and dried at 45°C in an oven for structural and microscopic investigations. All the experiments were carried out in duplicate.

The Si and Al chemical analyses were conducted on a microwave plasma-atomic emission spectrometer (MP-AES, Agilent MP 4100) coupled with a high-performance liquid chromatography (HPLC) setup, modified for analyzing strong alkali solutions. The measurement errors were less than 10% based on reproducibility tests.

2.3. Characterization of solid phases

XRD was carried out on a Bruker D8 diffractometer operating with Cu K α radiation (λ =0.154 nm). The samples were prepared as disoriented powders and scanned between 2 – 65 °2 θ with a 0.02 °2 θ step for 1 s per step. X'Pert Highscore software was used for qualitative identification of minerals. The crystallinity index of each samples was estimated using the Hinckley index according to Plançon et al. (1988); it is based on the ratio of the sum of the intensity of the (1 $\overline{10}$) and (1 $\overline{11}$) reflections measured from the inter-peak background, and the intensity of the (1 $\overline{10}$) peak determined from the general background. FTIR spectroscopy was performed on a Perkin

180 Elmer spectrometer using attenuated total reflectance (ATR) in the middle infrared (MIR) region 181 (4000 – 600 cm⁻¹) and each final spectrum is the average of 5 scans. The theoretical resolution of 182 the device is 2 cm⁻¹. Omnic software was used for spectrum analyses. 183 Al and Si K-edges XANES experiments were undertaken at LUCIA beamline (Soleil synchrotron, France). The X-ray beam was monochromated using a pair of KTP (011) crystals. 184 The energy was calibrated at the first inflexion point of the Al K-edge of an aluminum foil (1559) 185 eV) or of a silicon foil for the Si-K-edge (1839 eV). Spectra were collected in steps of 2 eV 186 187 below the edge, of 0.2 eV in the edge region and of 1 eV behind the edge, at a counting rate of 2 s 188 per step. Data were recorded in fluorescence mode using a mono-element silicon drift diode detector and corrected for the detector dead time. Data processing, normalization and analysis 189 190 were performed with the Athena software (Ravel and Newville, 2005). Data were corrected for 191 self-absorption based on the theoretical chemical formula of the mineral phases contained in the samples. References used for (i) Al K-edge XANES were synthetic gibbsite (Al(OH)₃), synthetic 192 193 kaolinite, boehmite (γ-AlO(OH)), orthoclase and andalusite (Figure SI 1 supplementary 194 information), and for (ii) Si K-edge XANES, quartz, kaolinite, orthoclase, andalusite and halloysite (Figure SI 1 supplementary information). 195 196 Solid-state NMR experiments were performed on a Bruker AVANCE III 700 spectrometer at 16.4 T ($v_0(^{27}\text{Al}) = 182.47 \text{ MHz}$) with 2.5 mm (25 kHz) double resonance Bruker MAS probes 197 198 and with samples spun at the magic angle using ZrO₂ rotors. For quantitative purposes, all 1D 199 ²⁷Al (I = 5/2) MAS NMR spectra were obtained by using short pulses ($\langle \pi/8 \rangle$). Nutation curves were first established by using a solution of 1M Al(NO₃)₃ (t_{90} °(27 Al) = 3.2 μ s, Recycle delay = 200 0.5s, number of scans = 6000-12000). 2D ²⁷Al 5QMAS NMR spectra (Medek et al., 1995) were 201 202 obtained by using an amplitude modulated Z-filter experiment (p₁-t₁(5Q evolution)- p₂-τ-p₃-

t₂(acquire) (Amoureux et al., 1996). The optimized pulse lengths of the 5Q excitation (p₁) and reconversion (p_2) were $p_1 = 4.5 \mu s$ and $p_2 = 1.5 \mu s$, respectively, implemented with an rf field of 55 and 165 kHz, whereas the soft $\pi/2$ Z-filter (p₃) was set to 6.5 μ s, which was delivered with an rf field of ~40 kHz (recycle delay = 0.2s, number of scans = 6000). ²⁷Al NMR chemical shifts were referenced to a 1M solution of Al(NO₃)₃, respectively. All decompositions of spectra were performed using the DMfit software (Massiot et al., 2002), available free of charge online. For ²⁷Al spectra, previous studies have clearly demonstrated the combined role of quadrupolar interaction and CSA on the line shapes, especially at high magnetic field (Papulovskiy et al., 2013). Lorentz/ Gaussian (L/G) line shapes were used for AIIV sites end the int2QUAD DMfit module was used under the assumption of finite rotation frequency for the central transitions for AlVI sites. The following parameters were taken into account for each 27 Al sites: $\delta_{iso}(^{27}$ Al), $C_Q(^{27}\text{Al}),~\eta_Q(^{27}\text{Al}),~d(CSA)$ corresponding to full Width at Half Maximum of the isotropic chemical shift gaussian distribution. The morphology of samples was observed (a) by Scanning Electron Microscope (SEM) on a JEOL IT300 LV operating at 10kV, samples being previously carbon coated, and (b) by Transmission Electron Microscope (TEM) using a JEOL JEM 2011 (CiNAM). For TEM observations, samples were suspended in water and left to dry on gold and copper grids. The analyses were conducted at the accelerating voltage of 200 kV. The parameters were 50 000x magnification, 20° tilt angle toward the EDX detector, energy range of 40 keV, corrected counting time of 30 s, constant beam density ~63.5 pA.cm⁻². Elements were quantified using the Bruker AXS TEM line mark data semi-quantification procedure (Berthonneau et al., 2014). EDX chemical analyses were performed on 20 individual particles. The size of the particles (mean from 30 particles) was manually measured on micrographs using ImageJ software.

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

3. Results and discussion

3.1. Alkali dissolution kinetics of kaolinites samples

Figure 1 presents the evolution of Al and Si released during the dissolution of KGa-1b and KGa-2 kaolinites with 2M alkali solutions at 80°C along time. The kinetic of dissolution of kaolinites exhibits gradual release of [Al] and [Si] in solution whatever the type of kaolinites used until 12h with 2M of KOH or KOH + NaOH, and following a log function as a function of time (t < 12h) reflecting a decrease of the dissolution rate with time. However, the two kaolinites do not react in the same way after 12h since in the case of KGa-2, it seems that there is a stabilization of the dissolution which is not the case for KGa-1b except for a mixed alkaline treatment. The dissolution phenomena observed by Bauer et al. (1998) on well-crystalline kaolinite at 80°C in 2M KOH evidenced that the change of slope occurs after 3-4 days when the concentrations of Si and Al are greater than 7 mmol/l. In our case the reaction is faster with a clear change of slope after 6hand Si and Al concentrations reaches values of 40 and 50 mmol/l for KGa-1b and KGa-2 respectively. A drastic decrease of [Al] and [Si] in solution is observed in the case of a NaOH treatment after 6 h, this effect being more pronounced and very rapid in the case of KGa-2 compare to KGa-1b (12h). This feature can be attributed to a re-precipitation phenomenon of solid(s) phase(s) that control concentration of Si and Al in solution (see discussions in section 3.2 Mineralogical evolution of kaolinite dissolution in high alkali media). Up to 6h, NaOH and KOH + NaOH mixtures seem to be the most efficient for the dissolution of both kaolinites (about 75%) \pm 2% of total Al and Si are released by KGa-1b and 82% \pm 2% released by KGa-2). However, after 6 hours, there is a secondary phase precipitation that results in a decrease of Si and Al concentrations in solution. Note that such decrease in aqueous Si and Al concentrations does not

mean that the dissolution reaction of the kaolinite is limited, and the reverse may be the case with an increase of the kaolinite dissolution as the thermodynamic equilibrium may not be reach due to the involvement of aqueous Si and Al in a side reaction, i.e. precipitation of secondary phases. With KOH treatment, 60 to 70% (± 2%) of total Al and Si are released in solution from both kaolinites. The orders of efficiency of alkaline treatment for the kaolinite dissolution follows: KOH < KOH + NaOH ≤ NaOH, taking into consideration a duration up to 6h since the reprecipitation occurs after. The results relative to the main efficiency of NaOH are in accordance with others study on the dissolution of different industrial aluminosilicate minerals in similar alkali media (Panagiotopoulou et al., 2007; Xu and van Deventer, 2003). However, this contrasts with the results from molecular dynamic simulations of Naderi Khorshidi et al. (2018) that suggest the cation with low charge density K⁺ encouraged more dissociation of the aluminate groups than the Na⁺ one. Si/Al molar ratio is calculated at each time step for all experiments, and the results show that the ratio is < 1 (0.80 < Si/Al < 0.98) regardless of the type of kaolinite at t < 6h, then stabilizes around 1 (0.99 ± 1) between 6 and 12 h for most of the experiments (Figure SI 2 Supplementary Information). Note that the Si/Al ratio of a theoretical kaolinite is closed to 1. To conclude, these data show that the rapid dissolution is incongruent at first during the alkaline attack and then

267

268

269

270

271

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

3.2. Mineralogical evolution of kaolinite dissolution in high alkali media

3.2.1. XRD and FTIR measurements

becomes congruent over time.

X-ray diffractograms were acquired on both initial materials and the alkali treatment residues (Figure 2) to characterize any significant changes of the solid phase during the alkali treatment.

The two kaolinite samples differ essentially in terms of crystallinity, i.e. amount and nature of structural defect. KGa-1b is a low-defect kaolinite (Hinckley index = 1.01) whereas KGa-2 is the high-defect one (Hinckley index = 0.37). The effect of the crystallinity results in higher values of CEC and SSA for KGa-2, the high defect one, compared to the KGa-1b. Two types of structural disorder can be considered in KGa-1b and KGa-2: one for KGa-2 from random interstratification of thin enantiomorphic blocks and a low ordered population of crystallites in which layer displacements occur in relatively high proportions; a second one for KGa-1b, corresponding to the highly ordered population of crystallites, due to structural periodicity seldom disturbed by isolated stacking faults (Sakharov et al., 2016). A significant decrease in post-treatment diffraction peaks is observed regardless of the type of kaolinite and the type of reflections, i.e. basal (00l) or (hkl), indicating changes in the diffracting domain size distribution and implying that the crystal shape changes. These results are in accordance with those of Pentrak et al. (2009) who observed similar decreases of the diffraction peaks along alkaline treatment with 4 M KOH solution. The alteration of the diffraction peaks is in accordance with kinetic data that clearly evidences a dissolution of crystallites in an alkaline medium. It results in a decrease over time of the Hinckley crystallinity index and a decrease in the ratio of (060)/(001) reflection band which may be similar to a reduction in coherence in the b direction of the kaolinite platelets. As expected, KGa-2 also shows a greater extent of dissolution, i.e. alteration, probably due to the lower crystallinity, so the decrease is thus more pronounced. Actually, it is not possible from XRD data to define the type of alteration and the mechanisms involved. In the case of the sodium treatment (NaOH 2 M), XRD measurements also evidence the presence of a new solid phase with several Bragg peaks corresponding to 6.34, 4.44, 3.64, and 2.56 Å inter-planar distances (Figure 2) related to a losod compound according to the JCPDS file

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

31-1269 (theoretical formulae Na₁₂Al₁₂Si₁₂O₄₈, 18 H₂O). This mineral phase is a polytype of 295 296 hydroxysodalite and basically belonging to zeolite mineral group, explaining the decrease of the 297 [Al] and [Si] in chemical analysis after 12h of contact time (Figure 1). 298 The zeolite precipitation is also pointed out by SEM observations (Figure SI 3 Supplementary 299 information) and after by FTIR (Figure 3). The formation of zeolites particles, uniform in size 300 and shape whatever the initial kaolinite sample, with the appearance of "wool ball" are noticeable 301 for both kaolinites (KGa-1b and KGa-2, Figure SI 3). This is in accordance with the literature 302 where several authors (e.g. Lin et al., 2004; Singer and Berkgaut, 1995) have obtained this type 303 of zeolite in concentrated sodium alkaline medium (> 3.5 M NaOH) at room temperature. In our 304 case, losod is obtained at a lower initial NaOH concentration because the reaction takes place at 305 80°C, which facilitates precipitation in lower concentrations. Sieber and Meier (1974) showed 306 that zeolite-like losod crystallized only from mixtures with low sodium contents ($0.25 \le \text{Na/Al} \le$ 307 1 and Si/Al \leq 1). In this experiment, the alkali treatment of kaolinite in NaOH leads to Na/Al = 308 0.63 and Si/Al = 1, confirming the possibility for zeolite to precipitate. Na⁺ is then easily and 309 rapidly recombined with Al and Si in solution leading to zeolite precipitation. Finally, the presence of zeolites-like or other phases resulting from precipitation in a basic medium was not 310 311 observed in the case of KOH or NaOH + KOH. This means that the presence of K in the system 312 inhibits the precipitation of zeolite under these experimental conditions. However, Bauer et al. 313 (1998) have observed the precipitation of phillipsite-type zeolite in KOH 2M at 80°C but after 30 314 days of time contact of a kaolinite sample. This difference may be related for the authors to the 315 presence of accessories minerals in the initial sample acting as precursors, which are not present

316

in the KGa-1b and KGa-2 samples.

ATR-FTIR measurements in the MIR range are reported in Figure 3. The focus is previously done on the case of KOH or KOH + NaOH treatments for 24 h. The data evidences (i) in the OHstretching region, a decrease of the v1 band (3690 cm⁻¹) coupled with a slight decrease in absorbance of the v2 and v3 bands located at 3669 and 3650 cm⁻¹. These three bands are respectively due to the 3 inner surface hydroxyls. The v1 and v2 bands are the coupled antisymmetric and symmetric vibrations (Brindley, 1986) whereas the v3 is due to symmetry reduction from an inner surface hydroxyl (Farmer and Russell, 1964). The fourth band v4 at about 3620 cm⁻¹ is attributed to the inner hydroxyl (Johnston et al., 1990; Rouxhet et al., 1977); (ii) in the Al-bending vibration range (δAl2-OH; 935 and 912 cm⁻¹ corresponding to the OH of inner-surface hydroxyl groups and the OH deformation of inner hydroxyl groups), no difference is effective between spectra of both treated kaolinite; (iii) in the case of the absorption band near 1000 cm⁻¹ related to a polymeric tetrahedral aluminosilicate network (Farmer et al., 1979), a slight increase of the band located at 1005 cm⁻¹ is observed along alkali treatment. It was reported in the literature that this band can be relative to an excess of AlO₄ units in the aluminosilicate framework (Pentrák et al., 2009). Finally, in highly alkaline solution (KOH or a mixture KOH + NaOH), all the FTIR results indicate the OH bands alteration, especially for the 3 inner surface hydroxyls, and the fact that the Al coordination could evolved from octahedral to tetrahedral coordination specifically in the case of the lower crystalline kaolinite (Sanz et al., 1988; Singh and Mackinnon, 1996). We can thus hypothesize that the dissolution is preferentially located at the edge of the particle as well as on the inner OH surface, corroborating the dissolution data obtained before. Indeed, the experimental results are consistent with a dissolution mechanism involving inward movement of a dissolution front from crystal edges and the corner than the surface (Noiriel et al., 2019; Rozalén et al., 2008). During the dissolution, the dissociation of the

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

OH groups could be related to the modification in the Al coordination probably with a change from the octahedral (6-fold, AlO₆) to tetrahedral (4-fold, AlO₄) configurations.

By contrast, the spectra of kaolinites treated with NaOH exhibit important changes. Starting from the raw kaolinite spectra, the signal of the OH stretching bands drastically decreases. The region of Si-O modes is totally redefined by the appearance of a single and broad band at 938 cm⁻¹ with shoulders at 1001 and 1025 cm⁻¹. Moreover, a broad band at 3400 cm⁻¹ and a band at 1650 cm⁻¹ appear in the spectra corresponding to the vibrations (stretching and bending respectively) of water. Unfortunately, such signal in the 1100-700 cm⁻¹ range is characteristic of the overlaps signal of different mineral phases (*i.e.* zeolite as already highlighted from the XRD profiles plus kaolinite). Consequently, it is difficult to follow the dissolution effect on kaolinite in this range due to (i) the overlapping of zeolite spectra, (ii) the infrared spectra decomposition which is not trivial and (iii) the insufficient sensitive decomposition to observe structural modification.

3.2.2. Change in the Al and Si speciation from XANES

To understand the effects of the alkaline treatment on kaolinites, XANES was undertaken to unravel the evolution of the atomic environment of Si and Al through the dissolution process. Figures 4 and 5 present respectively Al and Si-K-edge XANES measurements obtained on kaolinite samples before and after alkaline treatment at 24h.

The Al K-edge spectra (Figure 4) have a similar structural environment corresponding to an isoelectronic AlO_6^{9-} clusters displaying typical features for 1:1 clays with a low site symmetry and Al octahedrally coordinated linked by the edge to form a dioctahedral gibbsitic layer (2/3 octahedral sites with Al and a vacancy). The weak shoulder at 1565 eV is assigned to the allowed transition of Al 1s electrons to antibonding t_{tu} state (p-like transition) (Ildefonse et al., 1998; Li et

al., 1995). The white line is located at 1570 eV and the peaks located at 1567 eV (before multiscattering effect) and 1574 eV (post-edge region) may be due to the transitions of Al 1s electrons to t_{2g} and e_g states (d-like transition), respectively. Finally, two broad components also occur in the post-edge region at 1578 eV and 1589 eV due to multi-scattering effect and the first EXAFS oscillation, respectively. According to the alkali treatment effect, the main modification consists in the increase of the component at 1564 eV whatever the treatment used (increasing drastically in the case of NaOH). The Al K-edge energy shift (1569 to 1564 eV) may be directly attributed to the change in coordination number of Al (Ildefonse et al., 1998; Li et al., 1995). The presence of Al(IV) near 1564 eV is evidenced in the case of NaOH or NaOH + KOH treated samples, and finally the Al(VI) at 1569 eV (Figure 4). Note that the presence of Al(V) cannot be excluded as its signal near 1564 eV is combined with that of Al(IV) and Al(VI)⁴⁹. XANES results suggest the presence of Al(IV) after 24h of alkali treatment whatever the treatment used. This fact is clearly evidenced for NaOH treatment and mainly in the case of the KGa-2 sample. However, the resulting spectra in the case of the NaOH treatment (Figure 4) reflects the overlap of zeolite-like mineral with kaolinite one, making difficult to decipher the contribution of one to another to the Al speciation. Indeed, the coordination of Al in zeolite is mainly 4-coordinated (as already observed in the case of the orthoclase mineral) inducing the high amount of Al(IV); it is thus difficult to conclude about the direct effect on Al speciation evolution after 6h (from XRD data) within the kaolinite during NaOH treatment. The Si K-edge spectra of the kaolinite alkali treated (Figure 5) are qualitatively very similar in accordance with the literature (Li et al., 1995). All Si K-edge spectra of kaolinite display a strong edge maximum at 1846 eV which can be ascribed to the 3s transition (Ildefonse et al., 1998). The poorly resolved features 3p and 3d-like transitions at 1849 and 1853 eV is due to the scattering

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

atoms within the tetrahedral layer, and finally the multiple scattering effect (1851 eV) from the more distant shell atoms. No change in the morphology of the spectra is observed. It may be interpreted in a similar way considering that Si present similar structural environment and SiO₄⁴⁻ clusters. Therefore, regardless of the type of treatment (KOH and NaOH + KOH) no (or very little) modification of the tetrahedral layer of kaolinites is effective. The environmental change in the case of NaOH treatment is related to zeolite precipitation (see before) in which the environment of silicon is modified compared to that of kaolinite.

Overall, our XANES measurement at the Si and Al K-edge reveal a strong modification of the Al octahedral layer along the dissolution effect favouring the transformation of Al(VI) into Al(IV or V) regardless of the type of treatment. However, in the case of NaOH treatment, the change in speciation is probably also linked to the precipitation of zeolite (Al speciation being in four-coordinated environment). Moreover, there is no modification related to tetrahedra local organization (tetrahedral layer). Consequently, the latter dissolves with release of Si without modification of its environment.

3.2.3. Quantification of the Al tetracoordinated from 27Al MAS-NMR

To resolve the different Al sites, 27 Al MAS NMR experiments and multiple-quantum MAS techniques have been utilized and are reported in Figures 6 and 7 respectively for the two kaolinites, each treatment and for 24h of time. The signal observed at 7.3 and 7.6 ppm for KGa-1b and KGa-2 is consistent with a six-coordinated Al in accordance with the literature (MacKenzie and Smith, 2002) (signal between 10 to +15 ppm). This peak is close to the true isotropic chemical shift (δ_{iso}). The position of this resonance is constant whatever the treatment and the kaolinite used, but it seems that its intensity drastically decreases in the case of NaOH treatment with the increase of Al-four coordinated resonance. For the raw kaolinite, a weak

second peak located at 70.1 and 69.8 ppm for KGa-1b and KGa-2 is attributed to the presence of a four-coordinated Al-O species (MacKenzie and Smith, 2002), and correspond to the presence of accessories mineral, as crandallite in the samples (Chipera and Bish, 2001). This resonance seems to be stable whatever the treatment and time except after 24h. After this period of NaOH + KOH and KOH treatment, a new peak located near 60 ppm is observed and attributed to the presence of four-coordinated Al-O species directly linked to the kaolinite structure. The contribution of the peak (corresponding to the quantification of Al(IV)) represents 1.9 and 12.9 % of the total Al for KGa-1b and KGa-2 after NaOH + KOH treatment, whereas the contribution increases respectively to 8.5 and 14% after KOH treatment. In the case of NaOH treatment after 24h, ²⁷Al MQMAS NMR experiment was performed to disentangle the contributions from alkali-treated kaolinite, zeolite and crandallite (Figure 7). The decomposition of the signal clearly shows four resonances in the 4-coordinated Al region whatever the type of kaolinite. The peak at about 68 ppm is attributed to crandallite (Kim and Kirkpatrick, 1996). The contribution at 60 ppm is assigned to Al(IV)-coordinated linked to the kaolinite particles and corresponds to 22.7 and 61.7% of Al (IV) for KGa-1b and KGa-2 respectively. Finally, the NMR signals related to the Al(IV) component from zeolites appear at 56 and 58 ppm, corresponding to q⁴ Al atoms with only Si neighbors, and a contribution at 63 ppm ascribed to q³ Al atoms, i.e. with three Si atoms and one neighboring OH group (Dedecek et al., 2012). The investigations realized from NMR analysis clearly evidenced that the alkali treatments induce the change in Al speciation in kaolinite in accordance to XANES experiments: change of Al speciation from (VI) to (IV) but no evidence was done for the presence of Al(V)coordinated. Moreover, the integration of each contribution shows the importance of (i) kaolinite crystallinity toward dissolution reactivity in alkaline treatment: the KGa-2 being more reactive,

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

inducing the transformation up to 61.7% of Al(IV) after NaOH treatment; and (ii) the role of cation since NaOH treatment is more effective compare to KOH and KOH + NaOH mixtures.

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

431

432

3.3. Explanation of the dissolution process toward cationic effect in high alkali solution

To study more precisely the effect of particle dissolution in various alkaline media, TEM investigations were carried out at the particle scale (Figure 8). Before the alkali treatment, TEM images of both KGa-1b and KGa-2 (Figures 8a and 8e) evidence the recognizable platy and hexagonal crystals of kaolinite. The mean size of the KGa-2 is lower than for KGa-1b, in accordance with the literature (Gormley and Addison, 1983). After 24 h of treatment with 2 M KOH (Figures 8b and 8f), the initial hexagonal shape of kaolinite particles is no more observable whatever the kaolinite samples. Anisotropic dissolution can be observed with apparent higher dissolution of clay minerals crystal edges than basal surfaces (no clear etch pits visible on basal planes or retreat), with a rather homogeneous retreat of all the edges. The retreat of the crystal edges lead to the presence of sub-rounded platy particles instead of the well-shaped platy polyhedron present in the initial material. Affects. This mode of dissolution, with a fastest dissolution of edges (and corners) of the crystal edges, is quite classical as evidenced by local measurements at the mineral surfaces for other types of minerals (e.g. on carbonates (Noiriel et al., 2019)). However, due to this dissolution effect, it is almost impossible to determine quantitatively an average length and width of the particles. In the case of 2 M NaOH treatment (Figures 8c and 8g), the dissolution of kaolinite crystals is completely different. Indeed, the overall hexagonal shape of the kaolinite crystals is better preserved, but the dissolution is highly anisotropic, with different dissolution mechanisms from edge to edge with elongated etch pits

formed from some crystal edges and all oriented in the same direction, and with a retreat of other edges in a lesser extent. This phenomenon looks like etch pits observed during the dissolution of several silicates like quartz (Brantley et al., 1986) or feldspars (Pollet-Villard et al., 2016) among others. However, even if the formation of etch pits were previously describes on the basal planes of phyllosilicates (Kurganskaya et al., 2012; Kurganskaya and Luttge, 2013), this is the first time that this kind of dissolution process is observed in the case of clay minerals. These oriented dissolutions originate from structural properties of the crystal and could be linked to the activation of defects like dislocations, vacancy sites in octahedral sheets or sites where Al ions could have been substituted by Fe ions (possible substitution about 0.01 Fe atoms per half-cell) and propagation of the dissolution along 2D defects or following chains of weaker bonds into the crystal lattice. The mean length and width of dissolution pits are 192 nm versus 53 nm for KGa-1b and 146 nm versus 36 nm for KGa-2 respectively (±5%). These differences can be explained by the initial size of kaolinite particles inducing differences in term of dissolution pits morphology. In fact, there must be a critical size of dissolution channels. In the case of large particles with good crystallinity, dissolution is slow, and channels can spread over a large surface area along uninterrupted series of bonds in the crystal lattice. On the contrary it is supposed that the smaller and poorly crystalline particles present pits limited in size either because the propagation of the dissolution along a specific defects or chain of bonds will be interrupted by changes in the crystal lattice, or because of the quick coalescence of small pits before they can spread, which lead to a complete dissolution of the external parts of the particles (which is in agreement with the higher dissolution rate observed for KGa-2 kaolinite, see Figure 1 and previous discussions). As a result, the apparent pits sizes for KGa-2 are smaller. With 2M KOH + NaOH treatment (Figures 8d and 8f), a combination of both phenomena is observed, i.e., the hexagonal shape vanishing and the two types of alteration: homogeneous retreat from the edge as

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

observed in KOH treatment, and oriented dissolution from some edges as observed in NaOH treatment. By calculating the number of Al and Si atoms per half kaolinite cell from EDX microanalyses obtained by TEM on discrete kaolinite particles after 24 hours of treatment (Figure 9), it is found that there are differences according to the treatments. The evolution is linear, which implies a relationship between the different treatments on kaolinites dissolution without ruling out a different dissolution mode in accordance with TEM photography and dissolution kinetics. Indeed, in the case of a KOH-based treatment, the Al content in the particles decreases with an increase in Si compared to a particle that has not undergone treatment, whereas in the case of NaOH the shift is less significant but results in a decrease in Si with an increase in Al. As expected, the changes induced during the mixed treatment (NaOH + KOH) are intermediate. The fact that both dissolution modes (isotropic and anisotropic) are observed in treatment of kaolinites with KOH + NaOH confirm the effect of the cation (K⁺ or Na⁺) during the alkali treatment. Finally, in the case of KOH treatment, the isotropic dissolution seems to be more intense at the level of the octahedral layer inducing a decrease in the quantity of Al(VI)-coordinated. In the case of NaOH, the dissolution being oriented, the modifications are less intense since they are located on specific zones. Even if the octahedral layer is destroyed, the tetrahedral layer is also strongly altered, favoring the surface dissolution of kaolinite. For this reason, the amount of Si is lower after a NaOH treatment than after a KOH treatment. Moreover, this type of dissolution probably induces the change in the speciation of Al located at the edge of each oriented dissolution zone. Finally, the dissolution of the octahedral layer acts as an activator for the dissolution of the tetrahedral layer. Consequently, the dissolution of kaolinite seems to be due to the first deprotonation of Al group and thus enhancing negative charges on both Al and Si sites. When the

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

mechanism is engaged, the dissolution occurs similarly whatever the type of layer. On the other hand, the crystallinity of kaolinite seems to influence the progress of this dissolution. Indeed, in the case of a turbostratic stacking (lower crystallinity; KGa-2) the number of defects and access paths for dissolution is greater, whereas in the case of a kaolinite of good crystallinity, it is more difficult to balance the dissolution process in a congruent manner. According to the literature, the congruence or not of the dissolution of kaolinite is a matter of controversy. Indeed, the potentiometric titration of surface speciation of kaolinite shows that the kaolinite dissolves congruently at pH value < 4 and pH value > 11 (Bauer et al., 1998; Huertas et al., 1998; Pentrák et al., 2009). Moreover, Carroll-Webb and Walther (1988) and Xie and Walther (1992) suggested from calculation and potentiometric titrations that the dissolution is probably nonstoichiometric at first and then followed by a long-term, steady state congruent dissolution then in accordance with this study, whereas Naderi Khorshidi et al. (2018) evidence a congruent dissolution over the time from molecular dynamic. The authors explained that the dissolution mechanism of kaolinite basal surfaces in alkali media as follow: the Na+ solution triggers more surface hydroxyl groups to dissociate from the octahedral surface than the K⁺ solution but in contrast, K⁺ solution results in greater dissociation of the aluminate groups than the Na⁺ solution. They attributed the different dissolution mechanism of the two cations to their difference in the charge density. Indeed, owing to the smaller size of Na⁺ (i.e., higher charge density), Na⁺ exhibits stronger interaction with O⁻ (or OH groups) on the partially deprotonated octahedral surface and therefore, increases the tendency of the dissociation of O⁻ (or OH groups), not the moieties containing Al atom. Moreover, Carroll-Webb and Walther (1988), through their work on the surface complex reaction model for the pH-dependence of kaolinite dissolution, show that the measure of specific surface area obtained from SEM is smaller than the BET one after dissolution experiments. The authors suggest the presence of small channels (not shown in their paper but suggested) along kaolinite

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

edges which are accessible to Kr adsorption. According to this work and since Na⁺ with a higher charge density induced more hydroxyl groups to dissociate than K⁺, it is possible to hypothesize that protons or hydroxyl ions can penetrate easily between kaolinite layers starting from these channels inducing an increase of oriented dissolution.

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

525

526

527

528

4. Conclusion

This study aimed (i) to understand the effect of the alkali treatment onto kaolinites in order to improve their reactivity along alkaline activated materials, and finally to (ii) determine the role of crystal chemistry relative to their reactivities toward alkali activation. Thus, it has been shown that the degree of dissolution of kaolinites (82% of Al released for KGa-2 compare to 75% for KGa-1b in the case of NaOH treatment), is directly related to the type of alkaline treatment and the cation involved. Indeed, the quantity of Si and Al released is relative to the order: KOH<NaOH + KOH<NaOH. This difference can be directly explained by the different charge density between these two cations K+ or Na+: the high charge density cation, such as Na+, induced more dissociation of hydroxyl groups compare to the low charge density cation one (K⁺). However, the dissolution rate is higher in the poorly crystallized kaolinites, thus confirming the role of the crystallinity of the samples towards reactivity in an alkaline media. On the other hand, thermodynamic conditions cause zeolite-like precipitation in the case of an alkaline treatment based on NaOH. The dissolution process could thus be considered according to two steps: (i) a first rather short incongruent dissolution corresponding to the activation/dissolution of the octahedral layer by deprotonation (Al being link together to bonding oxygens with Si and to OH groups); (ii) a following congruent dissolution as soon as the system is initiated. This dissolution is accompanied by a change in the speciation of the aluminum probably on the edges of the particles from 6-coordinated to a 4-coordinated one, as shown by XAS and MAS-NMR results. However, the dissolution process at the particle level is different depending on the type of cation used. Indeed, in the case of KOH, the dissolution is homogeneous, starting with the edges and surfaces, whereas in the case of NaOH, the dissolution is probably oriented thanks to areas of less coherence.

These new and unique results are essential to better understand the dissolution processes during the first steps of geopolymerization processes but also to better manage the type and reactivity of aluminosilicate alkaline sources and the choice of the cation of the alkaline solution.

Acknowledgments

The authors thanks Project INIFUGE supported by Andra under the "Investing in the Future Programme" ("Investissement d'Avenir") - Selected under the Andra Call for Projects: "optimisation of post-dismantling radioactive waste management", organized in cooperation with the French National Research Agency (ANR). Moreover, we acknowledge SOLEIL for provision of synchrotron radiation facilities along project 20180745 and we would like to thank all the members for assistance in using LUCIA beamline, and the French Region Ile de France SESAME program for financial support (700 MHz spectrometer). Finally, the authors thanks B. Terasawa for Cobra, the saturday night fever and 80'ies music for nocturne beamline works.

References

- Aldabsheh, I., Khoury, H., Wastiels, J., Rahier, H., 2015. Dissolution behavior of Jordanian clay-
- rich materials in alkaline solutions for alkali activation purpose. Part I. Appl. Clay Sci.
- 570 115, 238–247. https://doi.org/10.1016/j.clay.2015.08.004
- 571 Amoureux, J.-P., Fernandez, C., Steuernagel, S., 1996. Z Filtering in MQMAS NMR. J. Magn.
- 572 Reson. A 123, 116–118. https://doi.org/10.1006/jmra.1996.0221
- Autef, A., Joussein, E., Gasgnier, G., Pronier, S., Sobrados, I., Sanz, J., Rossignol, S., 2013. Role
- of metakaolin dehydroxylation in geopolymer synthesis. Powder Technol. 250, 33–39.
- 575 https://doi.org/10.1016/j.powtec.2013.09.022
- Bailey, S.W., 1988. Polytypism of 1:1 layer silicates. Hydrous Phyllosilicates Exclus. Micas Rev.
- 577 Mineral. 19, 9–27.
- Bauer, A., Berger, G., 1998. Kaolinite and smectite dissolution rate in high molar KOH solutions
- at 35° and 80°C. Appl. Geochem. 13, 905–916. https://doi.org/10.1016/S0883-
- 580 2927(98)00018-3
- Bauer, A., Velde, B., Berger, G., 1998. Kaolinite transformation in high molar KOH solutions.
- 582 Appl. Geochem. 13, 619–629. https://doi.org/10.1016/S0883-2927(97)00094-2
- Belver, C., Bañares Muñoz, M.A., Vicente, M.A., 2002. Chemical Activation of a Kaolinite
- under Acid and Alkaline Conditions. Chem. Mater. 14, 2033–2043.
- 585 https://doi.org/10.1021/cm0111736
- 586 Berthonneau, J., Grauby, O., Ferrage, E., Vallet, J.-M., Bromblet, P., Dessandier, D.,
- Chaudanson, D., Baronnet, A., 2014. Impact of swelling clays on the spalling decay of
- building limestones: insights from X-ray diffraction profile modeling. Eur. J. Mineral. 26,
- 589 643–656. https://doi.org/10.1127/0935-1221/2014/0026-2393

- 590 Brantley, S.L., Crane, S.R., Crerar, D.A., Hellmann, R., Stallard, R., 1986. Dissolution at
- dislocation etch pits in quartz. Geochim. Cosmochim. Acta 50, 2349–2361.
- 592 https://doi.org/10.1016/0016-7037(86)90087-6
- 593 Brindley, G.W., 1986. Relation between Structural Disorder and Other Characteristics of
- Kaolinites and Dickites. Clays Clay Miner. 34, 239–249.
- 595 https://doi.org/10.1346/CCMN.1986.0340303
- 596 Carroll, S.A., Walther, J.V., 1990. Kaolinite dissolution at 25 degrees, 60 degrees, and 80 degrees
- 597 C. Am. J. Sci. 290, 797–810.
- 598 Carroll-Webb, S.A., Walther, J.V., 1988. A surface complex reaction model for the pH-
- dependence of corundum and kaolinite dissolution rates. Geochim. Cosmochim. Acta 52,
- 600 2609–2623. https://doi.org/10.1016/0016-7037(88)90030-0
- 601 Catauro, M., Bollino, F., Papale, F., Lamanna, G., 2014. Investigation of the sample preparation
- and curing treatment effects on mechanical properties and bioactivity of silica rich
- 603 metakaolin geopolymer. Mater. Sci. Eng. C 36, 20–24.
- 604 https://doi.org/10.1016/j.msec.2013.11.026
- 605 Chipera, S.J., Bish, D.L., 2001. Baseline Studies of the Clay Minerals Society Source Clays:
- Powder X-ray Diffraction Analyses. Clays Clay Miner. 49, 398–409.
- 607 https://doi.org/10.1346/CCMN.2001.0490507
- 608 Costanzo, P.A., Guggenheim, S., 2001. Baseline studies of the clay minerals society source clays:
- preface. Clays Clay Miner. 49, 371–371.
- 610 Cui, X.-M., Zheng, G.-J., Han, Y.-C., Su, F., Zhou, J., 2008. A study on electrical conductivity of
- 611 chemosynthetic Al₂O₃–2SiO₂ geoploymer materials. J. Power Sources, Selected papers
- from the International Battery Materials Association 2007 Conference. In Memoriam of
- Juergen Besenhard 184, 652–656. https://doi.org/10.1016/j.jpowsour.2008.03.021

- Dedecek, J., Balgová, V., Pashkova, V., Klein, P., Wichterlová, B., 2012. Synthesis of ZSM-5
- Zeolites with Defined Distribution of Al Atoms in the Framework and Multinuclear MAS
- NMR Analysis of the Control of Al Distribution. Chem. Mater. 24, 3231–3239.
- 617 https://doi.org/10.1021/cm301629a
- Duxson, P., Fernández-Jiménez, A., Provis, J.L., Lukey, G.C., Palomo, A., van Deventer, J.S.J.,
- 619 2007. Geopolymer technology: the current state of the art. J. Mater. Sci. 42, 2917–2933.
- 620 https://doi.org/10.1007/s10853-006-0637-z
- Farmer, V.C., Fraser, A.R., Tait, J.M., 1979. Characterization of the chemical structures of
- natural and synthetic aluminosilicate gels and sols by infrared spectroscopy. Geochim.
- 623 Cosmochim. Acta 43, 1417–1420. https://doi.org/10.1016/0016-7037(79)90135-2
- Farmer, V.C., Russell, J.D., 1964. The infra-red spectra of layer silicates. Spectrochim. Acta 20,
- 625 1149–1173. https://doi.org/10.1016/0371-1951(64)80165-X
- 626 Gormley, I.P., Addison, J., 1983. The in Vitro cytotoxicity of some standard clay mineral dusts in
- the respirable size range. Clay Miner. 18, 153–163.
- 628 https://doi.org/10.1180/claymin.1983.018.2.04
- Habert, G., d'Espinose de Lacaillerie, J.B., Roussel, N., 2011. An environmental evaluation of
- geopolymer based concrete production: reviewing current research trends. J. Clean. Prod.
- 631 19, 1229–1238. https://doi.org/10.1016/j.jclepro.2011.03.012
- Heller-Kallai, L., Lapides, I., 2007. Reactions of kaolinites and metakaolinites with NaOH—
- 633 comparison of different samples (Part 1). Appl. Clay Sci. 35, 99–107.
- https://doi.org/10.1016/j.clay.2006.06.006
- 635 Huertas, F.J., Chou, L., Wollast, R., 1999. Mechanism of kaolinite dissolution at room
- temperature and pressure Part II: kinetic study. Geochim. Cosmochim. Acta 63, 3261–
- 637 3275. https://doi.org/10.1016/S0016-7037(99)00249-5

- 638 Huertas, F.J., Chou, L., Wollast, R., 1998. Mechanism of Kaolinite Dissolution at Room
- Temperature and Pressure: Part 1. Surface Speciation. Geochim. Cosmochim. Acta 62,
- 640 417–431. https://doi.org/10.1016/S0016-7037(97)00366-9
- Ildefonse, P., Cabaret, D., Sainctavit, P., Calas, G., Flank, A.-M., Lagarde, P., 1998. Aluminium
- X-ray absorption Near Edge Structure in model compounds and Earth's surface minerals.
- Phys. Chem. Miner. 25, 112–121. https://doi.org/10.1007/s002690050093
- Johnston, C.T., Agnew, S.F., Bish, D.L., 1990. Polarized Single-Crystal Fourier-Transform
- Infrared Microscopy of Ouray Dickite and Keokuk Kaolinite. Clays Clay Miner. 38, 573–
- 583. https://doi.org/10.1346/CCMN.1990.0380602
- 647 Kim, Y., Kirkpatrick, R.J., 1996. Application of MAS NMR spectroscopy to poorly crystalline
- minerals: viséite. Mineral. Mag. 60, 957–962.
- https://doi.org/10.1180/minmag.1996.060.403.10
- 650 Kuenzel, C., Neville, T.P., Donatello, S., Vandeperre, L., Boccaccini, A.R., Cheeseman, C.R.,
- 2013. Influence of metakaolin characteristics on the mechanical properties of geopolymers.
- 652 Appl. Clay Sci. 83–84, 308–314. https://doi.org/10.1016/j.clay.2013.08.023
- Kurganskaya, I., Arvidson, R.S., Fischer, C., Luttge, A., 2012. Does the stepwave model predict
- 654 mica dissolution kinetics? Geochim. Cosmochim. Acta 97, 120–130.
- https://doi.org/10.1016/j.gca.2012.08.033
- 656 Kurganskaya, I., Luttge, A., 2013. A comprehensive stochastic model of phyllosilicate
- dissolution: Structure and kinematics of etch pits formed on muscovite basal face.
- Geochim. Cosmochim. Acta 120, 545–560. https://doi.org/10.1016/j.gca.2013.06.038
- 659 Li, D., Bancroft, G.M., Fleet, M.E., Feng, X.H., Pan, Y., 1995. Al K-edge XANES spectra of
- aluminosilicate minerals. Am. Mineral. 80, 432–440. https://doi.org/10.2138/am-1995-5-
- 661 602

- 662 Lin, D.-C., Xu, X.-W., Zuo, F., Long, Y.-C., 2004. Crystallization of JBW, CAN, SOD and ABW
- type zeolite from transformation of meta-kaolin. Microporous Mesoporous Mater. 70, 63–
- 70. https://doi.org/10.1016/j.micromeso.2004.03.003
- MacKenzie, K.J.D., Smith, M.E., 2002. Multinuclear Solid-State Nuclear Magnetic Resonance of
- Inorganic Materials. Elsevier.
- Massiot, D., Fayon, F., Capron, M., King, I., Calvé, S.L., Alonso, B., Durand, J.-O., Bujoli, B.,
- Gan, Z., Hoatson, G., 2002. Modelling one- and two-dimensional solid-state NMR spectra.
- Magn. Reson. Chem. 40, 70–76. https://doi.org/10.1002/mrc.984
- 670 Medek, A., Harwood, J.S., Frydman, L., 1995. Multiple-Quantum Magic-Angle Spinning NMR:
- A New Method for the Study of Quadrupolar Nuclei in Solids. J. Am. Chem. Soc. 117,
- 672 12779–12787. https://doi.org/10.1021/ja00156a015
- 673 Medri, V., Fabbri, S., Ruffini, A., Dedecek, J., Vaccari, A., 2011. SiC-based refractory paints
- prepared with alkali aluminosilicate binders. J. Eur. Ceram. Soc. 31, 2155–2165.
- https://doi.org/10.1016/j.jeurceramsoc.2011.05.006
- 676 Murray, H.H., 2006. Applied clay mineralogy: occurrences, processing, and applications of
- kaolins, bentonites, palygorskite, sepiolite, and common clays. Elsevier.
- 678 Murray, H.H., 2000. Traditional and new applications for kaolin, smectite, and palygorskite: a
- general overview. Appl. Clay Sci. 17, 207–221.
- Naderi Khorshidi, Z., Tan, X., Liu, Q., Choi, P., 2018. Molecular dynamics study of the
- dissolution mechanism of kaolinite basal surfaces in alkali media. Appl. Clay Sci. 152, 29–
- 682 37. https://doi.org/10.1016/j.clay.2017.10.025
- Naderi Khorshidi, Z., Tan, X., Liu, Q., Choi, P., 2017. Influence of structural Al and Si vacancies
- on the interaction of kaolinite basal surfaces with alkali cations: A molecular dynamics

686 https://doi.org/10.1016/j.commatsci.2017.09.004 687 Noiriel, C., Oursin, M., Saldi, G., Haberthür, D., 2019. Direct Determination of Dissolution Rates 688 at Crystal Surfaces Using 3D X-ray Microtomography. ACS Earth Space Chem. 3, 100-689 108. https://doi.org/10.1021/acsearthspacechem.8b00143 690 Panagiotopoulou, Ch., Kontori, E., Perraki, Th., Kakali, G., 2007. Dissolution of aluminosilicate 691 minerals and by-products in alkaline media. J. Mater. Sci. 42, 2967–2973. https://doi.org/10.1007/s10853-006-0531-8 692 693 Papulovskiy, E., Shubin, A.A., Terskikh, V.V., Pickard, C.J., Lapina, O.B., 2013. Theoretical and experimental insights into applicability of solid-state ⁹³Nb NMR in catalysis. Phys. Chem. 694 Chem. Phys. 15, 5115–5131. https://doi.org/10.1039/C3CP44016H 695 696 Pentrák, M., Madejová, J., Komadel, P., 2009. Acid and alkali treatment of kaolins. Clay Miner. 697 44, 511–523. https://doi.org/10.1180/claymin.2009.044.4.511 Plançon, A., Giese, R.F., Synderf, R., 1988. The Hinckley index for kaolinites. Clay Miner. 23, 698 699 249-260. 700 Pollet-Villard, M., Daval, D., Fritz, B., Knauss, K.G., Schäfer, G., Ackerer, P., 2016. Influence of 701 etch pit development on the surface area and dissolution kinetics of the orthoclase (001) 702 surface. Chem. Geol. 447, 79–92. https://doi.org/10.1016/j.chemgeo.2016.09.038 Rahier, H., Simons, W., Mele, B.V., Biesemans, M., 1997. Low-temperature synthesized 703 704 aluminosilicate glasses. J. Mater. Sci. 11. 705 Ravel, B., Newville, M., 2005. ATHENA and ARTEMIS: interactive graphical data analysis 706

using IFEFFIT. Phys. Scr. 2005, 1007. https://doi.org/10.1238/Physica.Topical.115a01007

Mater.

Sci.

140,

267-274.

Comput.

685

study.

- Rouxhet, P.G., Samudacheata, N., Jacobs, H., Anton, O., 1977. Attribution of the OH stretching
- 708 bands of kaolinite. Clay Miner. 12, 171–179.
- 709 https://doi.org/10.1180/claymin.1977.012.02.07
- 710 Rozalén, M.L., Huertas, F.J., Brady, P.V., Cama, J., García-Palma, S., Linares, J., 2008.
- Experimental study of the effect of pH on the kinetics of montmorillonite dissolution at
- 712 25°C. Geochim. Cosmochim. Acta 72, 4224–4253.
- 713 https://doi.org/10.1016/j.gca.2008.05.065
- Sakharov, B.A., Drits, V.A., McCarty, D.K., Walker, G.M., 2016. Modeling powder x-ray
- 715 diffraction patterns of the clay minerals society kaolinite standards: KGa-1, KGa-1b, and
- 716 KGa-2. Clays Clay Miner. 64, 314–333. https://doi.org/10.1346/CCMN.2016.0640307
- 717 San Nicolas, R., Cyr, M., Escadeillas, G., 2013. Characteristics and applications of flash
- 718 metakaolins. Appl. Clay Sci. 83–84, 253–262. https://doi.org/10.1016/j.clay.2013.08.036
- 719 Sanz, J., Madani, A., Serratosa, J.M., Moya, J.S., Aza, S., 1988. Aluminum-27 and Silicon-29
- 720 Magic-Angle Spinning Nuclear Magnetic Resonance Study of the Kaolinite-Mullite
- 721 Transformation. J. Am. Ceram. Soc. 71, C418–C421. https://doi.org/10.1111/j.1151-
- 722 2916.1988.tb07513.x
- Sieber, W., Meier, W.M., 1974. Formation and Properties of Losod, a New Sodium Zeolite. Helv.
- 724 Chim. Acta 57, 1533–1549. https://doi.org/10.1002/hlca.19740570608
- 725 Singer, Arieh., Berkgaut, Vadim., 1995. Cation Exchange Properties of Hydrothermally Treated
- 726 Coal Fly Ash. Environ. Sci. Technol. 29, 1748–1753. https://doi.org/10.1021/es00007a009
- 727 Singh, B., Mackinnon, I.D.R., 1996. Experimental Transformation of Kaolinite to Halloysite.
- 728 Clays Clay Miner. 44, 825–834. https://doi.org/10.1346/CCMN.1996.0440614
- van Deventer, J.S.J., Provis, J.L., Duxson, P., Lukey, G.C., 2007. Reaction mechanisms in the
- geopolymeric conversion of inorganic waste to useful products. J. Hazard. Mater., First

731	International Conference on Engineering for Waste Treatment: Beneficial Use of Waste								
732	and By-Products		(W	(WasteEng2005)		139,		5	06–513.
733	https://doi.org/10.1016/j.jhazmat.2006.02.044								
734	Xie, Z., Walther, J.V., 1992. Incongruent dissolution and surface area of kaolinite. Geochim.								
735	Cosmochim. Acta 56, 3357–3363. https://doi.org/10.1016/0016-7037(92)90383-T								
736	Xu, H., van Deventer, J.S.J., 2003. The effect of alkali metals on the formation of geopolymeric								
737	gels from	n alkali-feldspars.	Colloids	Surf. Phy	sicochem.	Eng.	Asp.	216,	27–44.
738	https://doi.org/10.1016/S0927-7757(02)00499-5								
739	Xu, H., Van Deventer, J.S.J., 2000. The geopolymerisation of alumino-silicate minerals. Int. J.								
740	Miner. Process. 59, 247–266. https://doi.org/10.1016/S0301-7516(99)00074-5								
741									

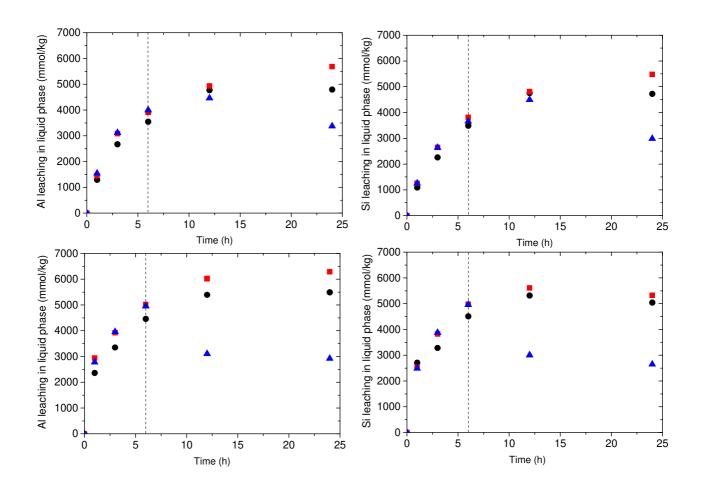


Figure 1. Proportion of Al (left) and Si (right) released (in mmol/kg of initial kaolinite) from kaolinites KGa-1b (upper diagrams) and KGa-2 (bottom diagrams) after various 2M alkali treatment along time (1, 3, 6, 12 and 24h). Circle, triangle and square refer to alkali treatments as KOH, NaOH and KOH + NaOH mixture, respectively. The dash line corresponds to the beginning of precipitation (6h).

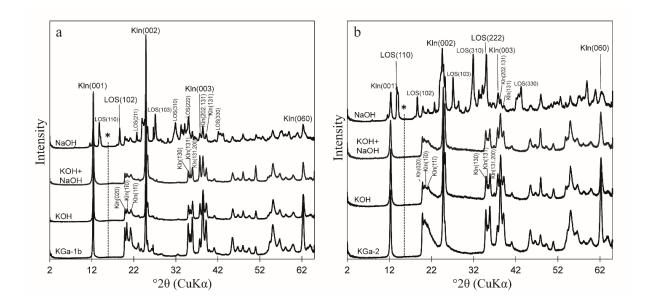


Figure 2. X-ray diffraction patterns of KGa-1b (a) and KGa-2 (b) after 24h of 2 M alkali treatment (KOH, NaOH and KOH + NaOH mixture). Kln and LOS refer to kaolinite and Losod-like zeolite, respectively, and * to crandallite.

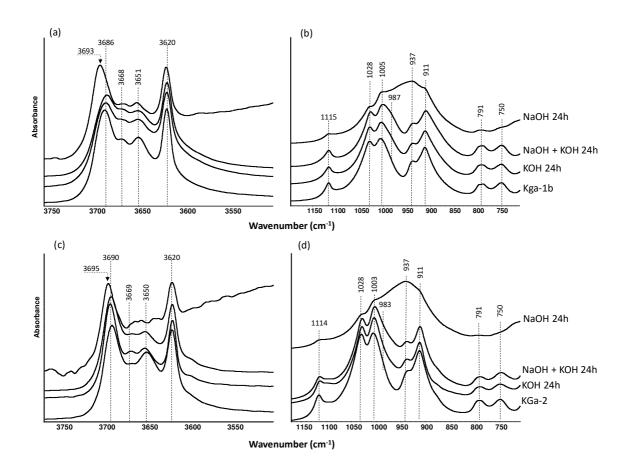


Figure 3. FTIR spectra of KGa-1b (a, b) and KGa-2 (c, d) after 24h of 2M alkali treatment (KOH, NaOH and KOH + NaOH mixture). Curves have been translated for the sake of clarity.

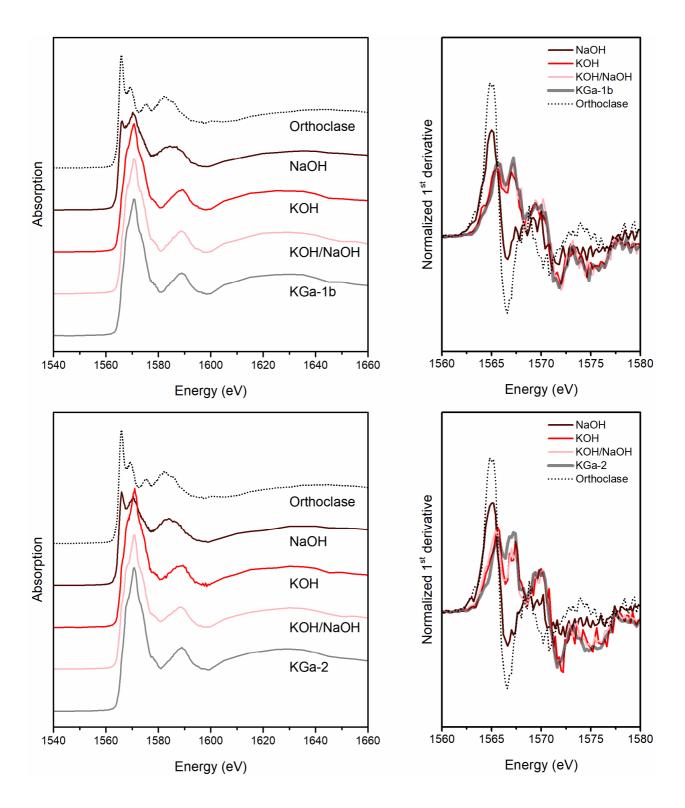


Figure 4. XANES and first derivative spectra at the Al K-edge of KGa-1b (top) and KGa-2 (bottom) raw samples and after 24h of 2M of KOH, NaOH and KOH + NaOH alkali treatment. An offset was applied along the y-axis to all XANES curves for clarity.

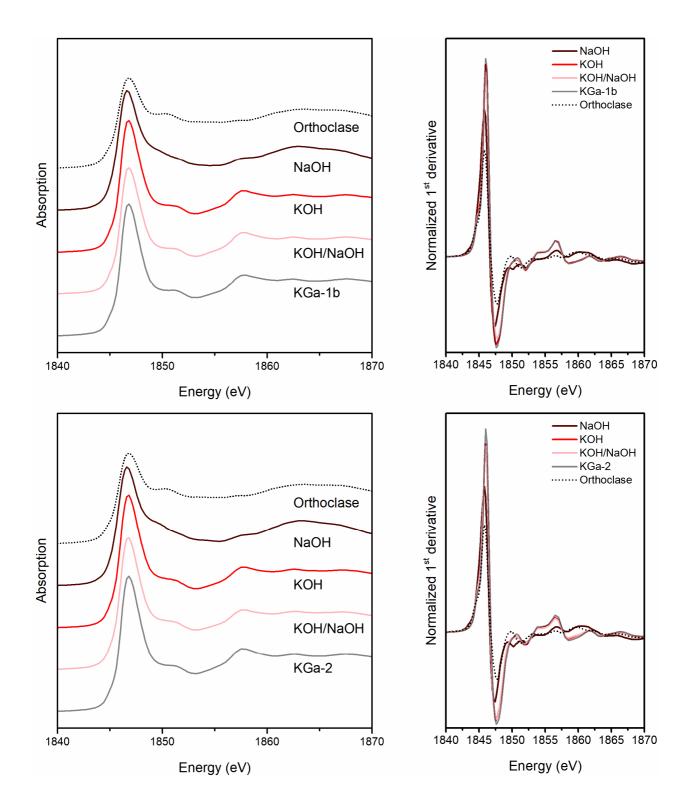


Figure 5. XANES and first derivatives spectra at the Si K-edge of KGa-1b (top) and KGa-2 (bottom) raw samples and after 24h of 2M of KOH, NaOH and KOH + NaOH alkali treatment. An offset was applied along the y-axis to all XANES curves for clarity.

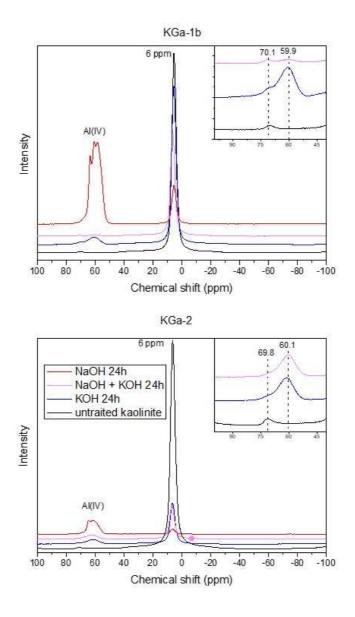


Figure 6. ²⁷Al MAS NMR spectra of KGa-1b (top) and KGa-2 (bottom) samples after 24h of KOH, KOH + NaOH and NaOH treatments, and zoom in the region 45 to 80 ppm.

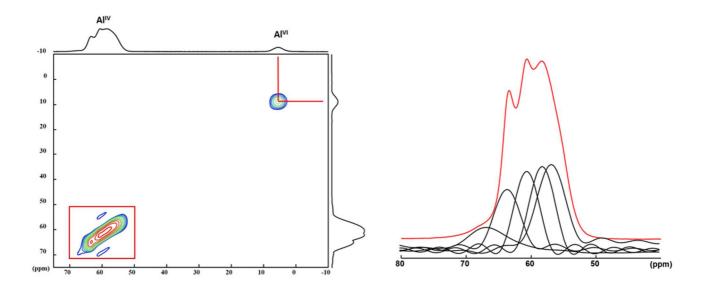


Figure 7. Example of ²⁷Al MQMAS spectrum of KGa-1b after 24h of NaOH treatment (left), MAS spectrum (in red) and MQMAS isotropic projections (in black) in the right hand.

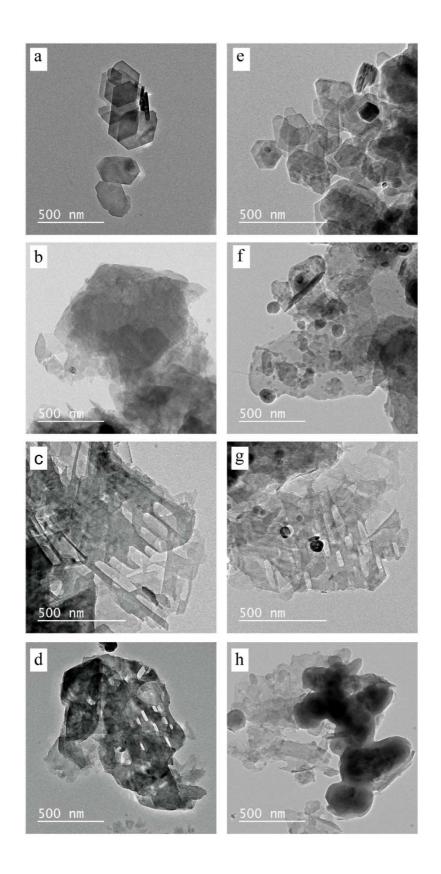


Figure 8. TEM images of KGa-1b (left column) and KGa-2 (right column) samples before (a, e) and after 24h of 2 M of KOH (b, f), NaOH (c, g) and KOH + NaOH (d, h) alkali treatments.

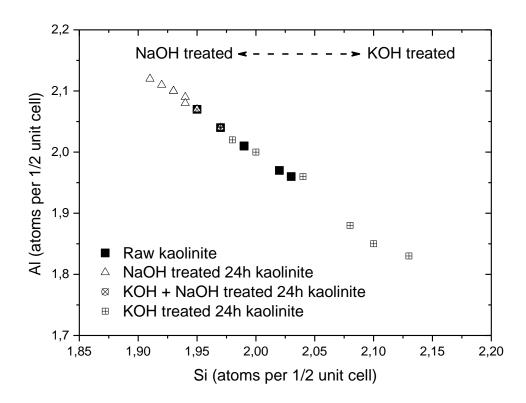


Figure 9. Evolution of the number of Al and Si atoms per half kaolinite unit-cell from EDX microanalyses obtained by TEM on discrete kaolinite KGa-1b and KGa-2 particles after 24 hours of treatment.

Alkali treatment of kaolinite

